




## HT

**Mild Steel Wall Mounted Enclosures complete with Back Plate**

Steel enclosures made from a continuous length of sheet steel. Both internally and externally protected with texturized polyester epoxy resin RAL7035 grey paint.

**Features and Benefits**

- Easily reversible door, as well as enabling 110° door opening
- Watertight gasket to guarantee the degree of protection
- Customised enclosures can be produced to accommodate specific dimensions, RAL colour requirements, and cable entries or cut outs (moq would apply)
- IK10
- Suitable for use indoors

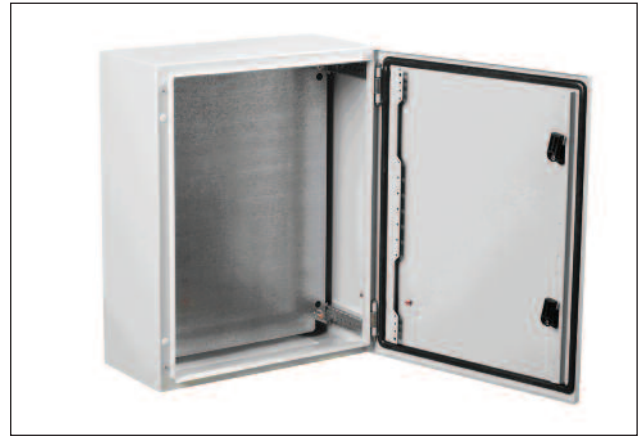

Wall Mounted Enclosure.


TYPE	Height mm	Width mm	Depth mm	IP Rating	Number of doors	Pack Cont.
HT252015	250	200	150	IP66	1	1
HT302515	300	250	150	IP66	1	1
HT302520	300	250	200	IP66	1	1
HT303015	300	300	150	IP66	1	1
HT303020	300	300	200	IP66	1	1
HT403015	400	300	150	IP66	1	1
HT403020	400	300	200	IP66	1	1
HT404020	400	400	200	IP66	1	1
HT504015	500	400	150	IP66	1	1
HT504020	500	400	200	IP66	1	1
HT504025	500	400	250	IP66	1	1
HT505025	500	500	250	IP66	1	1
HT604015	600	400	150	IP66	1	1
HT604020	600	400	200	IP66	1	1
HT605020	600	500	200	IP66	1	1
HT605025	600	500	250	IP66	1	1
HT606020	600	600	200	IP66	1	1
HT606025	600	600	250	IP66	1	1
HT606030	600	600	300	IP66	1	1
HT705020	700	500	200	IP66	1	1
HT705025	700	500	250	IP66	1	1
HT806020	800	600	200	IP66	1	1
HT806025	800	600	250	IP66	1	1
HT806030	800	600	300	IP66	1	1
HT808030	800	800	300	IP66	1	1
HT1008030	1000	800	300	IP66	1	1
HT1206030	1200	600	300	IP66	1	1
HT1010300	1000	1000	300	IP66	1	1
HT12080300	1200	800	300	IP66	1	1
HT12080400	1200	800	400	IP66	1	1



Comes with mounting plate



Enclosures over 1000mm high supplied with a 3 point locking system



### HTT

#### Mild Steel Wall Mounted Enclosures with Glazed Door complete with Back Plate

Steel enclosures with a transparent door. Both internally and externally protected with texturized polyester epoxy resin RAL7035 grey paint .

#### Features and Benefits

- Easily reversible door, as well as enabling 110° door opening
- Watertight gasket to guarantee the degree of protection
- 4mm thick tempered glass used for the transparent door
- IK09
- Suitable for use indoors
- Supplied with double bar lock as standard




Glazed Door Wall Mounted Enclosure.

TYPE	Height mm	Width mm	Depth mm	IP Rating	Number of doors	Pack Cont.
HTT303015	300	300	150	IP66	1	1
HTT403015	400	300	150	IP66	1	1
HTT403020	400	300	200	IP66	1	1
HTT404020	400	400	200	IP66	1	1
HTT504015	500	400	150	IP66	1	1
HTT504020	500	400	200	IP66	1	1
HTT504025	500	400	250	IP66	1	1
HTT505025	500	500	250	IP66	1	1
HTT604015	600	400	150	IP66	1	1
HTT604020	600	400	200	IP66	1	1
HTT606020	600	600	200	IP66	1	1
HTT606025	600	600	250	IP66	1	1
HTT705020	700	500	200	IP66	1	1
HTT705025	700	500	250	IP66	1	1
HTT806020	800	600	200	IP66	1	1
HTT806025	800	600	250	IP66	1	1
HTT806030	800	600	300	IP66	1	1



Comes with mounting plate



## Locks

### Locks and Keys to suit HT Enclosures

A range of locks and keys to suit the range of HT wall mounted enclosures.



Lock and Key HTFOK.

TYPE	Description	Pack Cont.
HTFOK	Full key operated lock with 405 key	1
LOCK&KEY	Replacement double bar lock	1
HTKLK	Replacement key for double bar lock	1

## SP


### Height Adjustment Elements to suit HT Enclosures

For 150, 200, 250, 300 and 400mm depth enclosures. The different positions allow the position of mounting plates and accessories to be adjusted to suit the requirement.



Height adjustable elements.

TYPE	Enclosure Depth mm	Pack Cont.
SP150	150	Set of 4
SP200	200	Set of 4
SP250	250	Set of 4
SP300	300	Set of 4
SP400	400	Set of 4



### HTWBRK

#### Wall Fixing Kit to suit HT Enclosures

Manufactured in galvanised steel. Fitted from the outside.  
Can be mounted vertically or horizontally.



Wall Fixing Kit.

TYPE	Pack Cont.
HTWBRK	Set of 4